

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number
WO 2005/068119 A1

(51) International Patent Classification⁷: **B23B 51/04**

(74) Agent: **KLAVERS, Cornelis, Wilhelmus, Alphonsus, Maria**; Markerkant 1201.20, NL-1314 AJ Almere (NL).

(21) International Application Number:
PCT/NL2004/000346

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 18 May 2004 (18.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04075048.1 17 January 2004 (17.01.2004) EP

(71) Applicant (for all designated States except US): **A.V. CUS-TOM STYLE B.V.** [NL/NL]; Postduivenveld 25, NL-2727 DC Zoetermeer (NL).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GILLISSEN, Hubert** [NL/NL]; Postduivenveld 25, NL-2727 DC Zoetermeer (NL).

[Continued on next page]

(54) Title: TOOL-CHANGE ARBOR SYSTEM

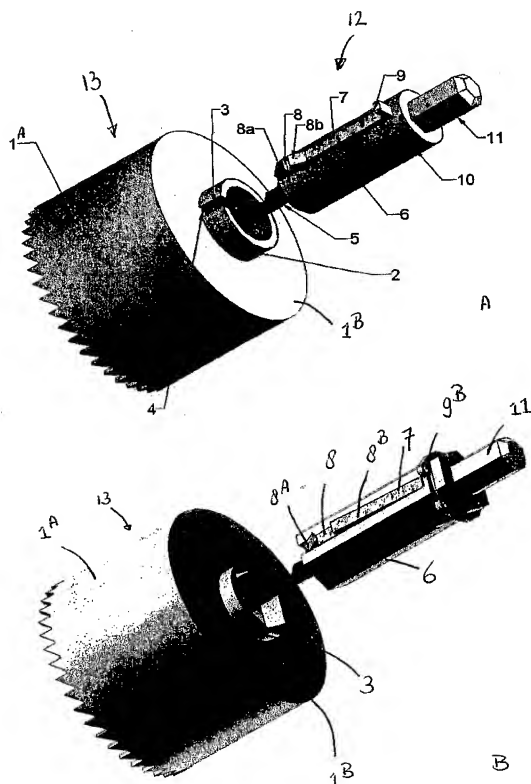

(57) Abstract: The invention concerns tool change arbor (12) system for a tool such as a hole-saw (13), as well as a hole-saw (13) and an adapter to allow for an existing hole-saw suitable to be used with the quick-change arbor (12) according to the invention. The quick-change arbor (12) consists of a longitudinal body (6) provided over almost its whole length with a groove, in which a spring-loaded latch (7) is mounted, which at one end is provided with a notch (8). The cup base (1b) of the hole-saw (13) is provided with a flange (2), of which the inner diameter corresponds with the diameter of the quick-change arbor (12). Furthermore, the flange is provided with a groove (3), which cooperates with the latch (7) in the quick-change arbor (12) and fixes the hole-saw (13) with respect to the quick-change arbor (12). The notch (8) in the latch ensures an axial fixation in concert with the rim (4) of the cup base at the position of the groove (3) in the flange (2). After unlocking of the hole-saw (13) by pressing the spring-loaded latch (7), the hole-saw (13) can be slid axially along the quick-change arbor (12), through which the sawn plug can be removed from the hole-saw (13) through the toothed end of the quick-change hole-saw (13).

WO 2005/068119 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*